OVERALL SCHEMATIC DIAGRAM

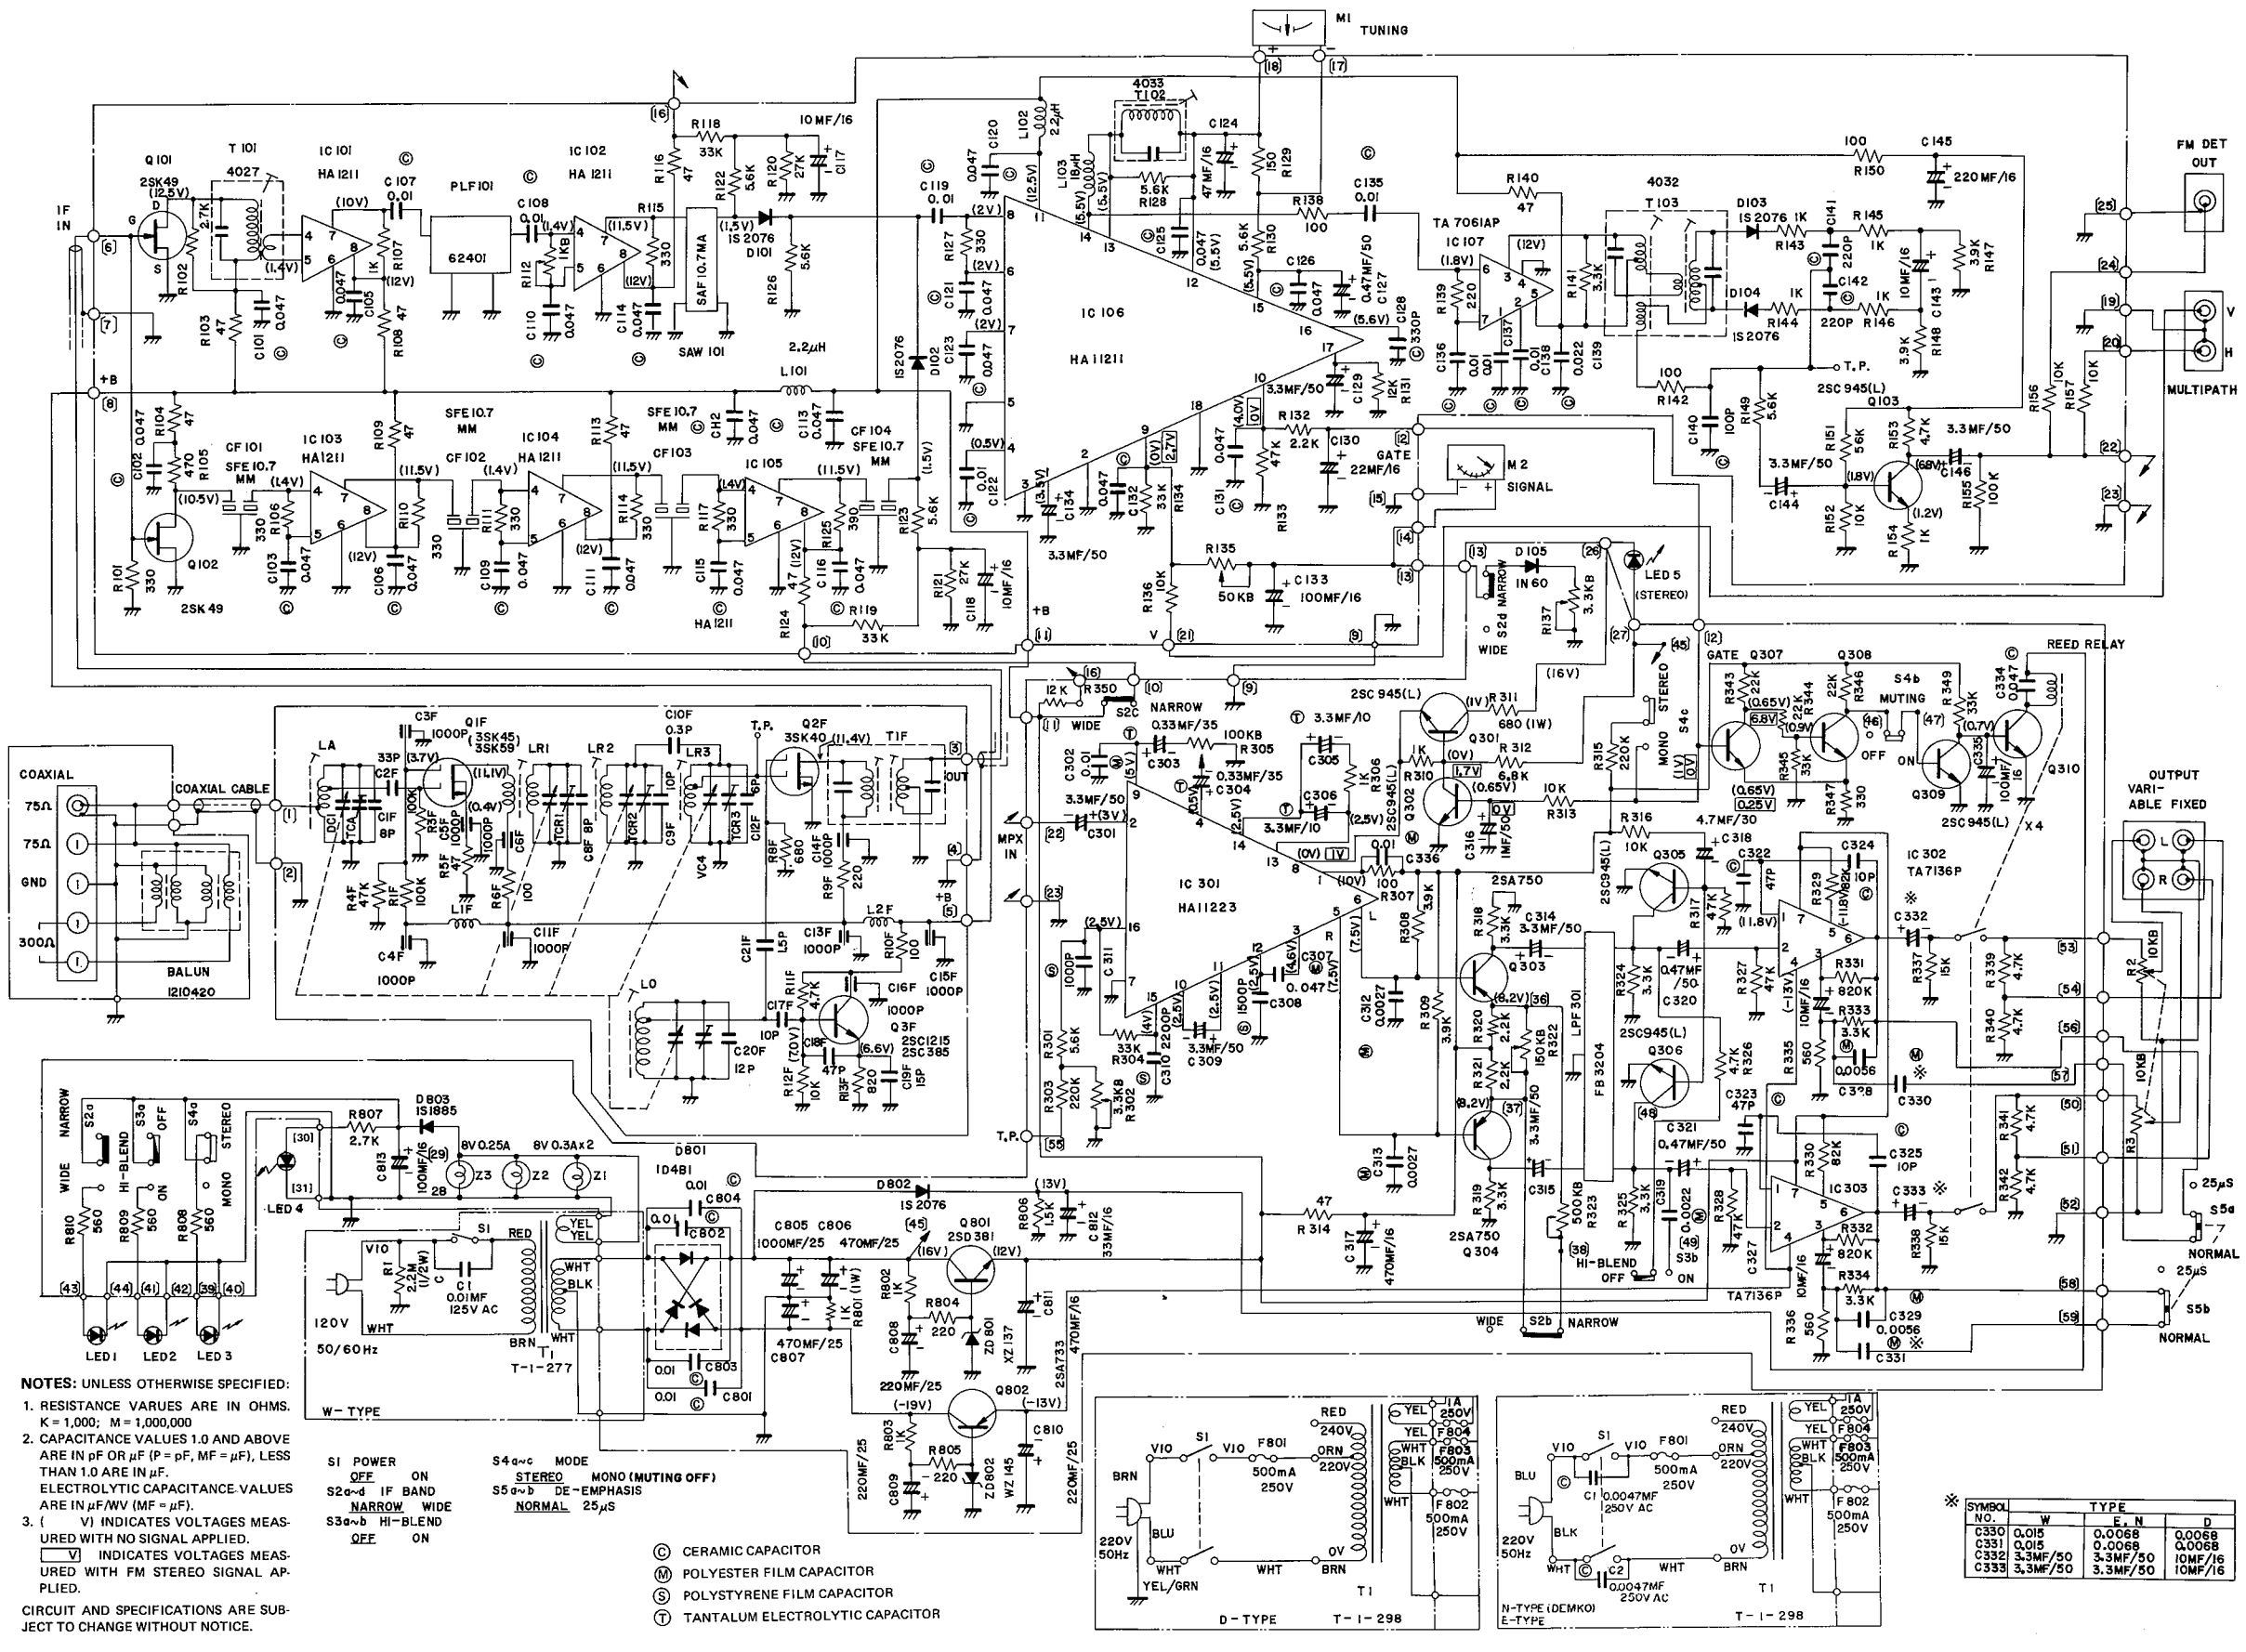

NOTES: UNLESS OTHERWISE SPECIFIED:

1. RESISTANCE VARUES ARE IN OHMS. K = 1,000; M = 1,000,000
2. CAPACITANCE VALUES 1.0 AND ABOVE ARE IN pF OR μF (P = pF, MF = μF), LESS THAN 1.0 ARE IN μF. ELECTROLYTIC CAPACITANCE VALUES ARE IN μF/WV (MF = μF).
3. (V) INDICATES VOLTAGES MEASURED WITH NO SIGNAL APPLIED. [V] INDICATES VOLTAGES MEASURED WITH FM STEREO SIGNAL APPLIED.

CIRCUIT AND SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Ⓒ CERAMIC CAPACITOR
Ⓜ POLYESTER FILM CAPACITOR
Ⓢ POLYSTYRENE FILM CAPACITOR
Ⓣ TANTALUM ELECTROLYTIC CAPACITOR

※

SYMBOL NO.	TYPE W	E, N	D
C330	0.015	0.0068	0.0068
C331	0.015	0.0068	0.0068
C332	3.3MF/50	3.3MF/50	10MF/16
C333	3.3MF/50	3.3MF/50	10MF/16