




2SA733(A)
2SC2003
2SC945(A)
2SD863



MC1495L




2SD1266



2SA937F
2SC2021F




2SA995
2SC2291




2SB941




2SK125
2SK125T
2SK246




2SK364



2SK122



2SK161
2SK241



2SK211
2SK302



2SK425

NJM4200D NJM5532D-D
NJM4560D

TD6104D








TD6301AP


μ PD4001BC
μ PD4013BC

μ PD4069UBC

LA1231NS
LB1494

(X05-3162-71)

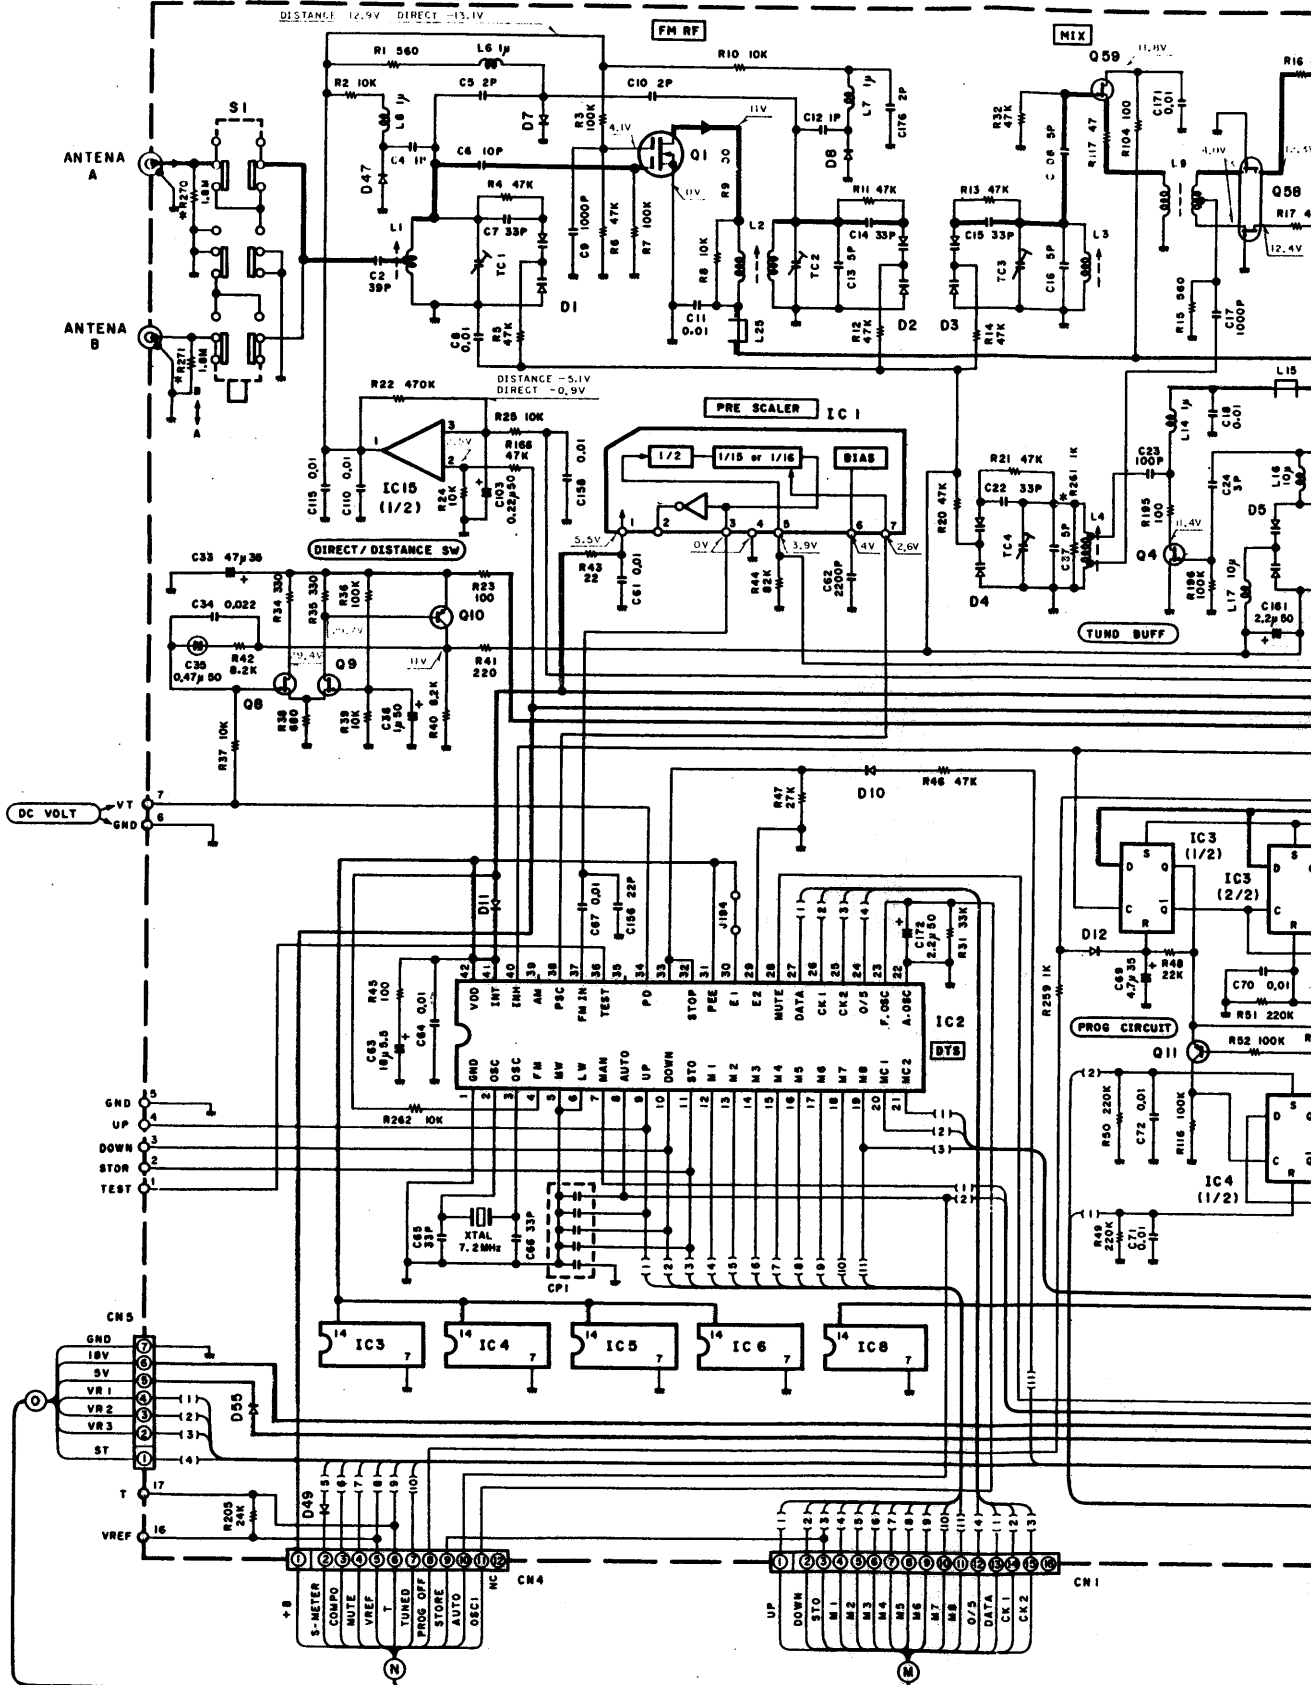

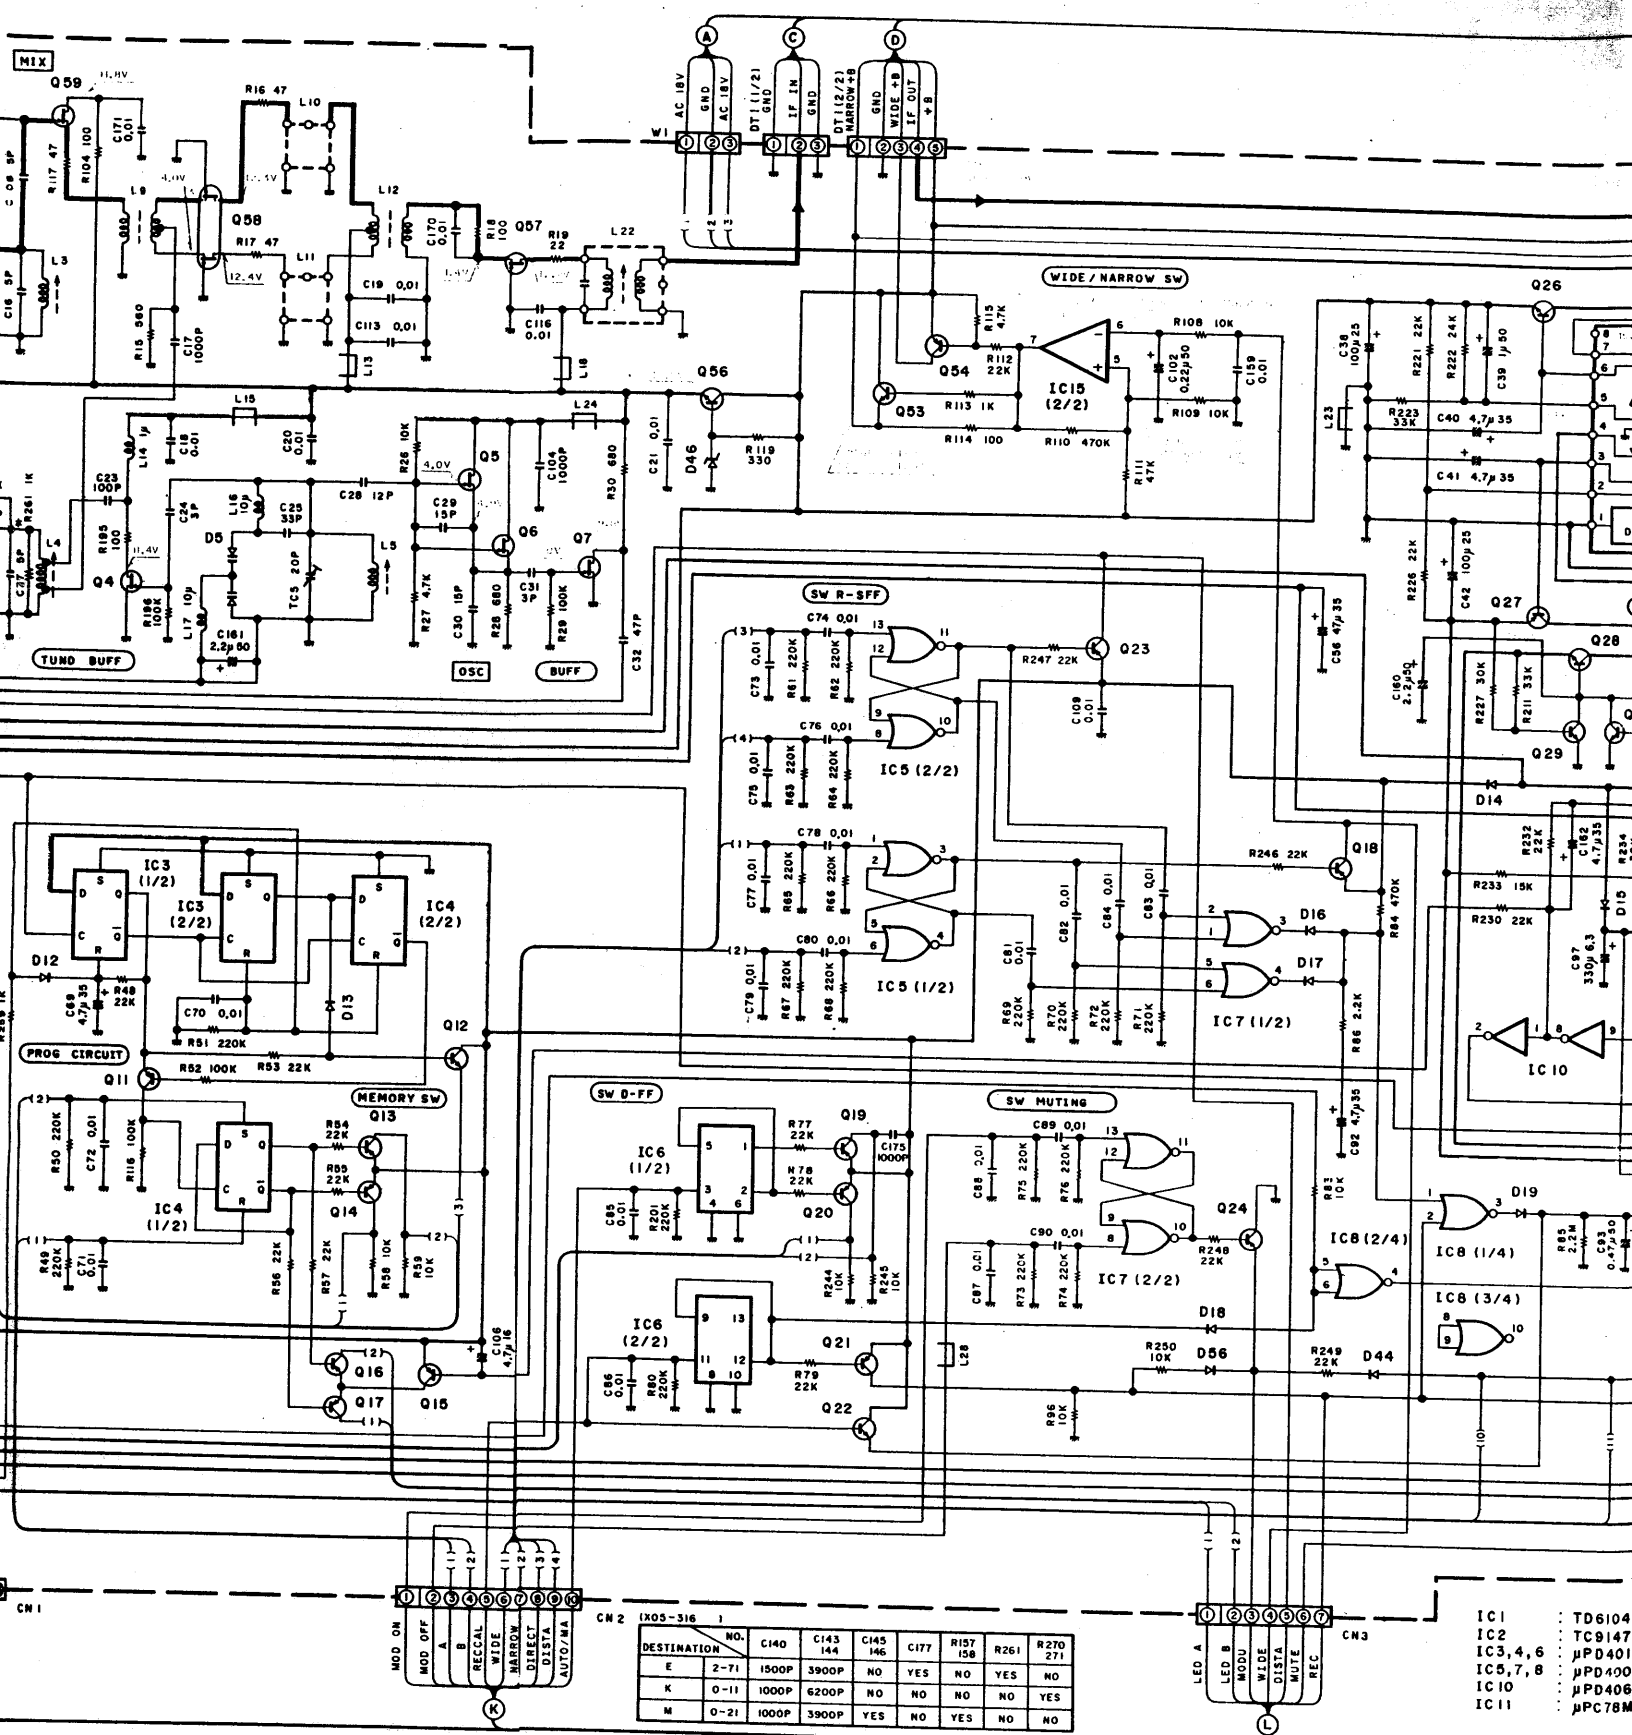

DESTINATION	NO.	C140	C143	C145	C177	R157	R261	R270
E	2-71	1500P	3900P	NO	YES	NO	YES	NO
K	0-11	1000P	6200P	NO	NO	NO	NO	YES
M	0-21	1000P	3900P	YES	NO	YES	NO	NO

- IC1 : TD6104
- IC2 : TC9147
- IC3,4,6 : μ PD401
- IC5,7,8 : μ PD400
- IC10 : μ PD406
- IC11 : μ PC78M

LA1231NS
LB1494

μ PC1163HA

BA668A


LB1290



AN6562
M5218P


TC9147BP

LB1473


M5230L

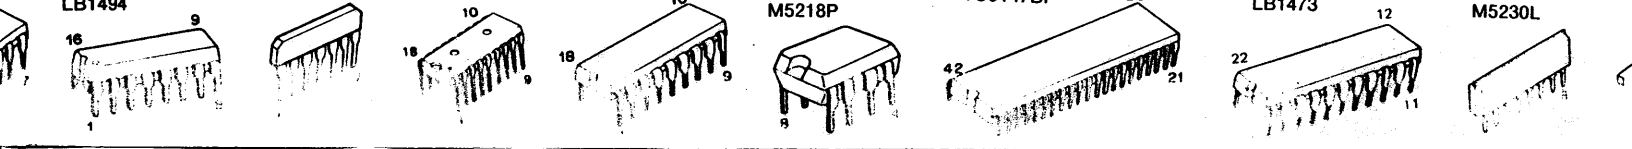

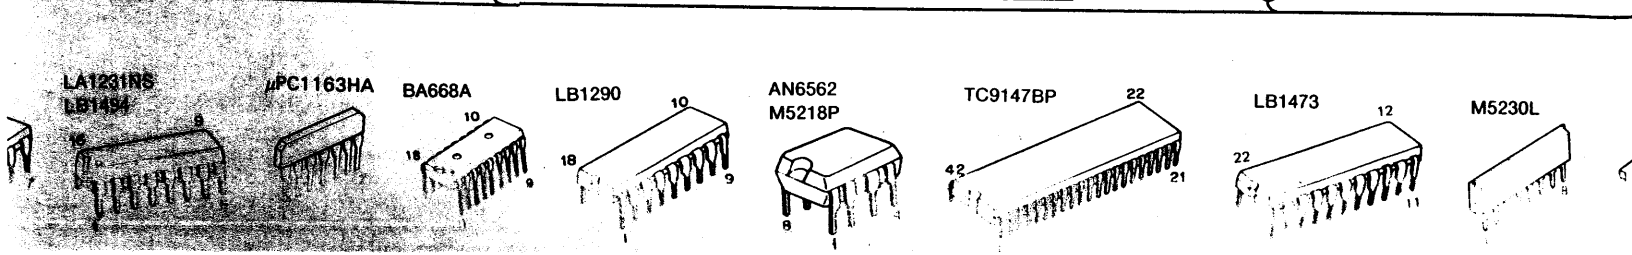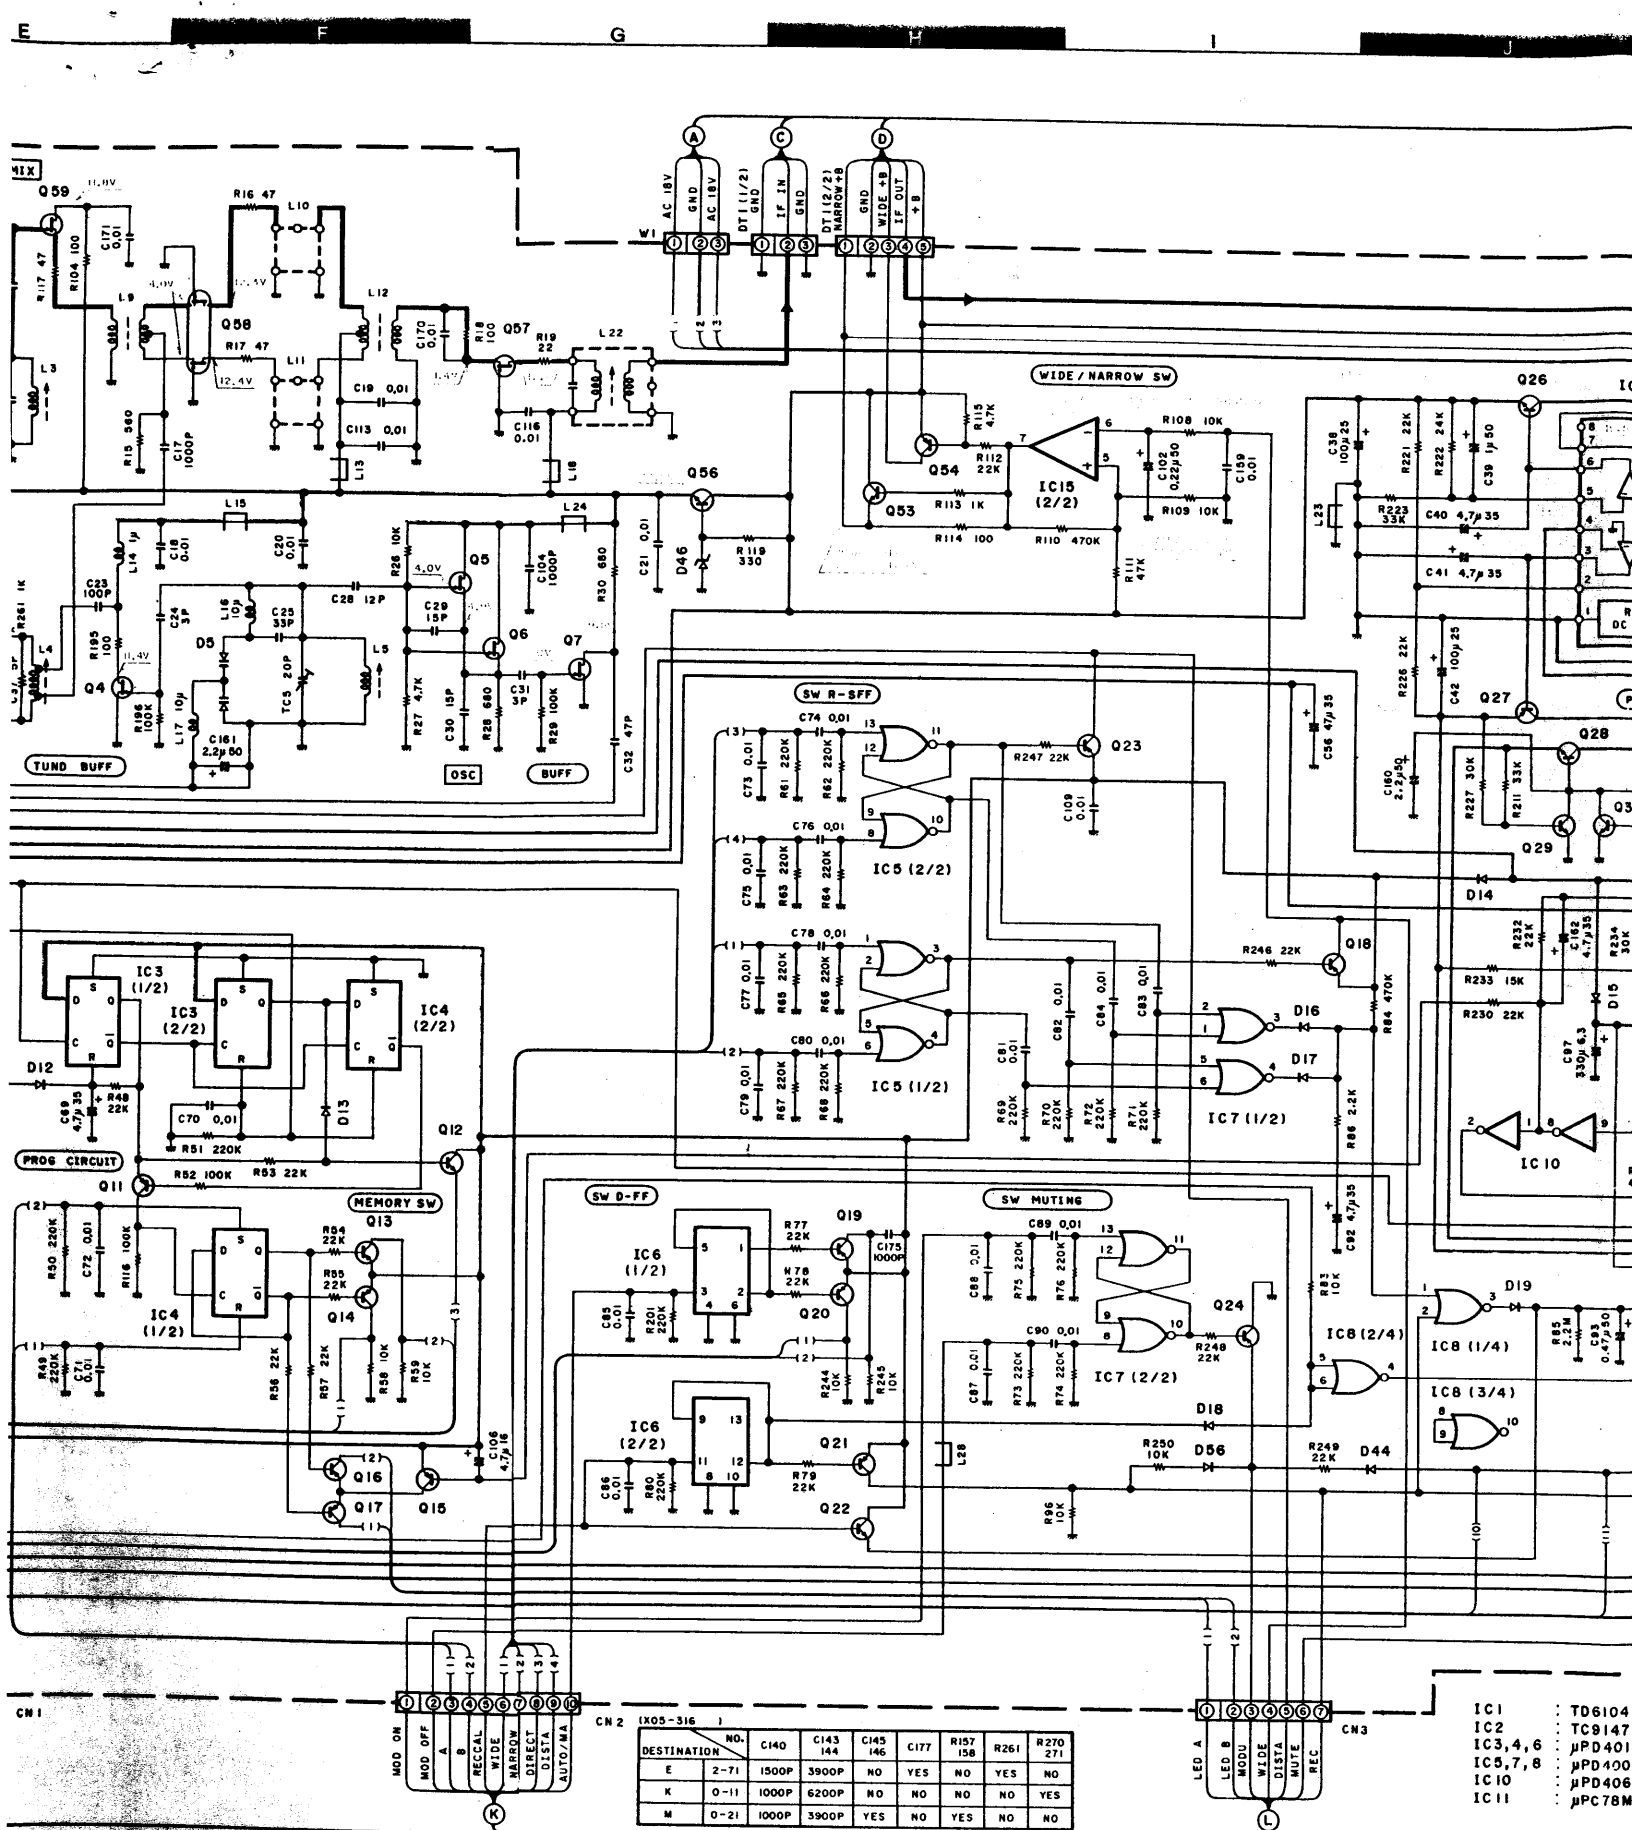

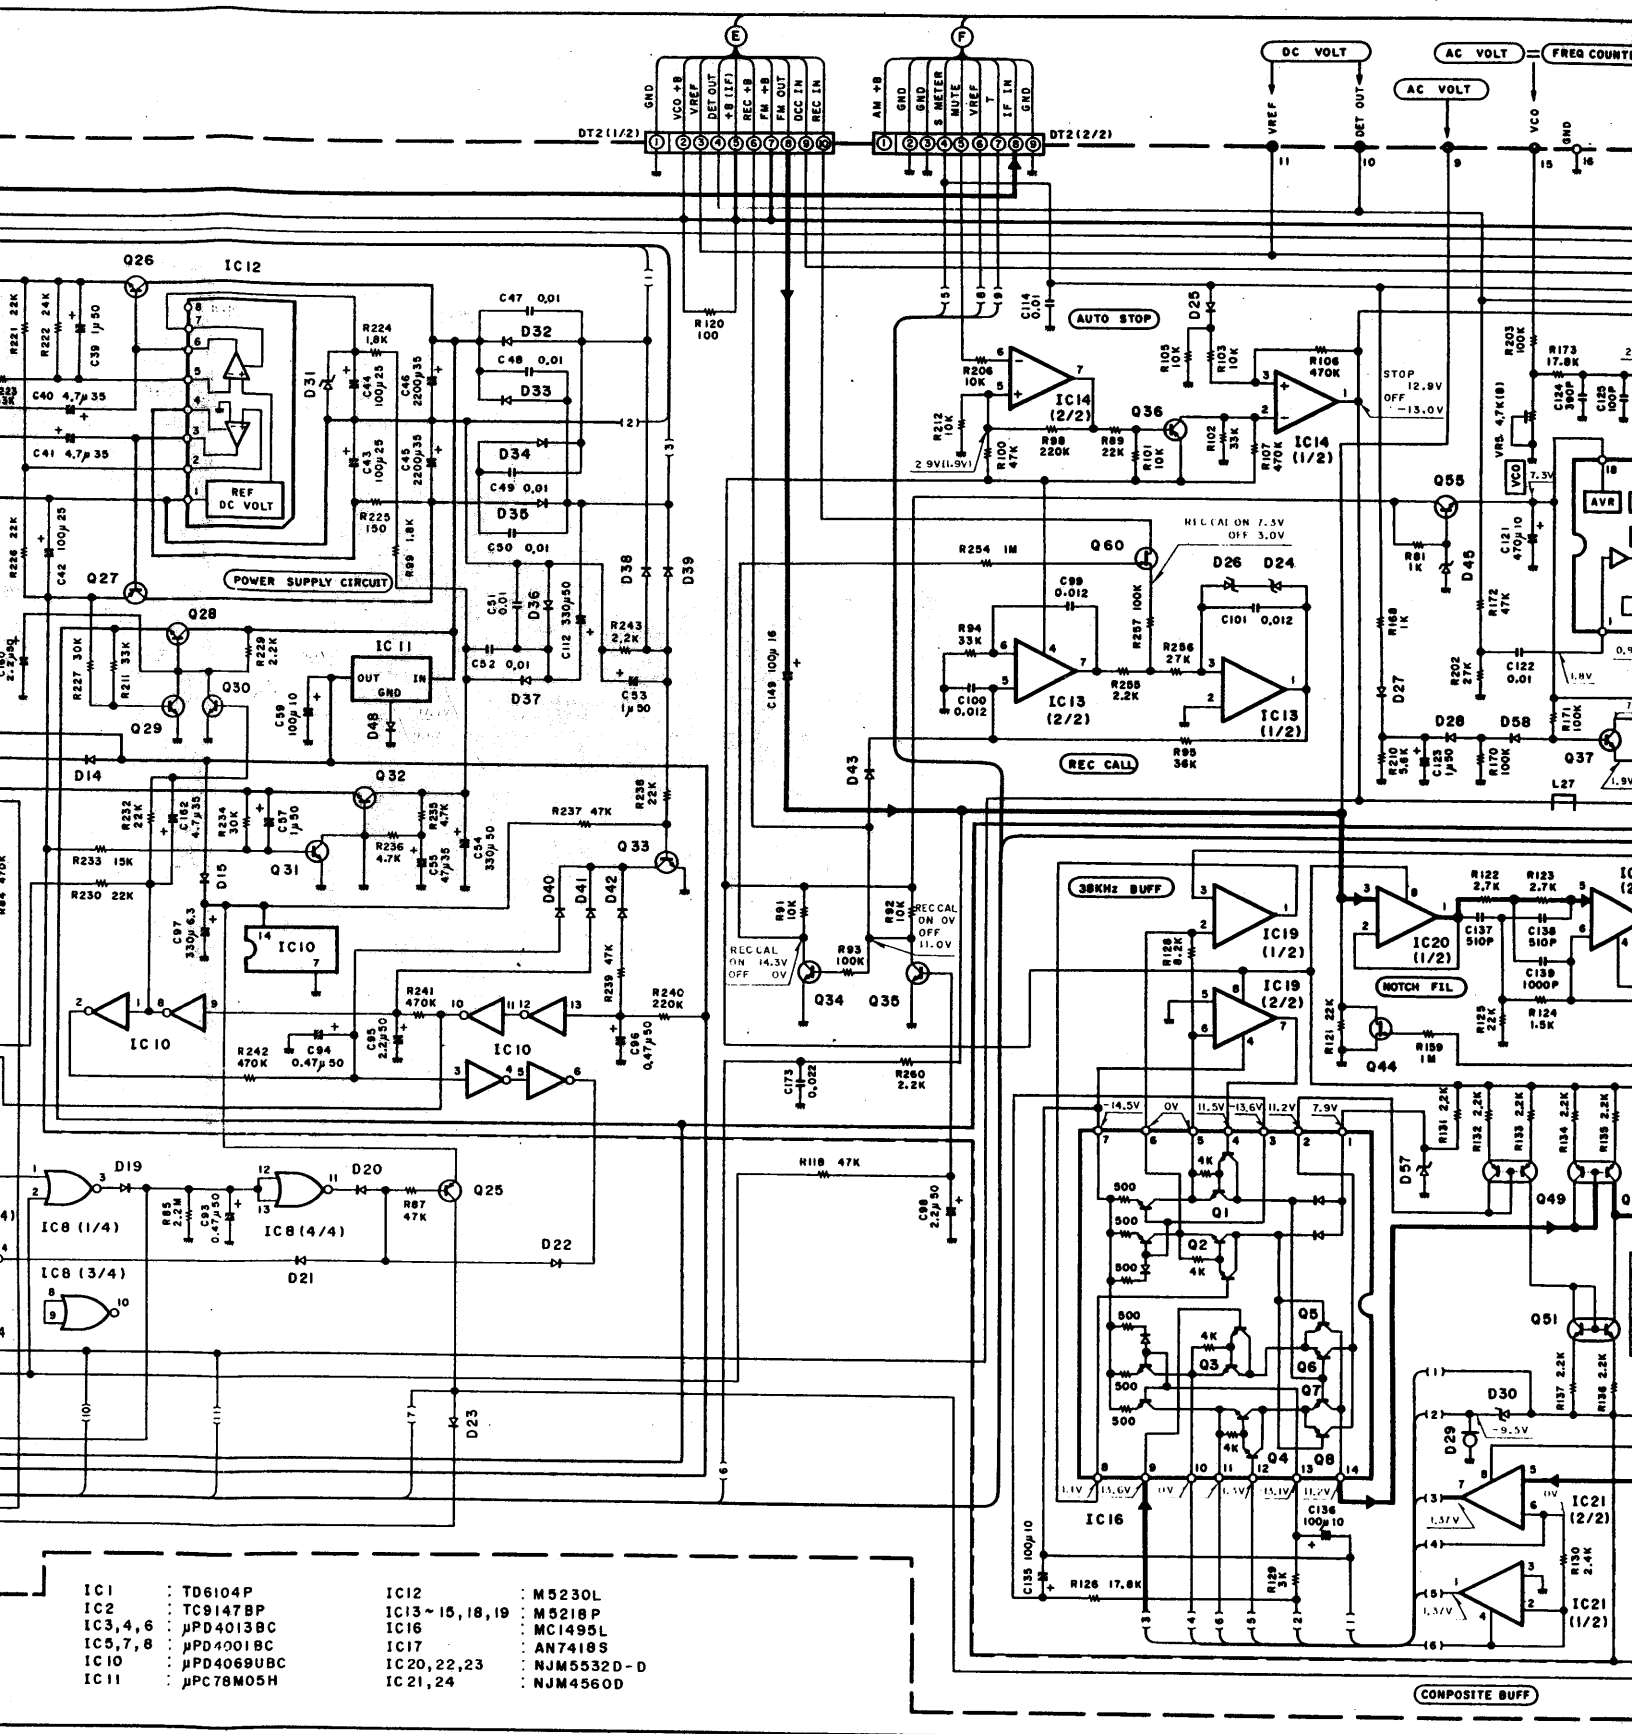


- | | | | |
|-----------|------------|-------------------|------------|
| IC1 | TD6104P | IC12 | M5230L |
| IC2 | TC9147BP | IC13 ~ 15, 18, 19 | M5218P |
| IC3, 4, 6 | μPD4013BC | IC16 | MC1495L |
| IC5, 7, 8 | μPD4001BC | IC17 | AN7418S |
| IC10 | μPD4069UBC | IC20, 22, 23 | NJM5532D-D |
| IC11 | μPC78M05H | IC21, 24 | NJM4560D |

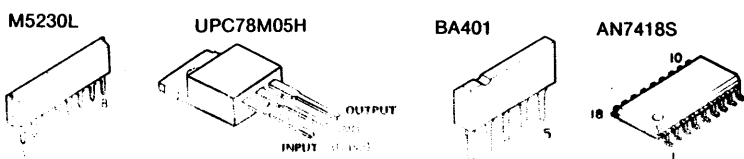


CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

Les tensions c.c. de l'appareil (avec une force de pression) peuvent différer légèrement des valeurs indiquées sur les schémas et aux instants de mesure.


DC voltages are as measured with a high impedance voltmeter during normal operation. Peak-to-peak voltages are as measured across the load.

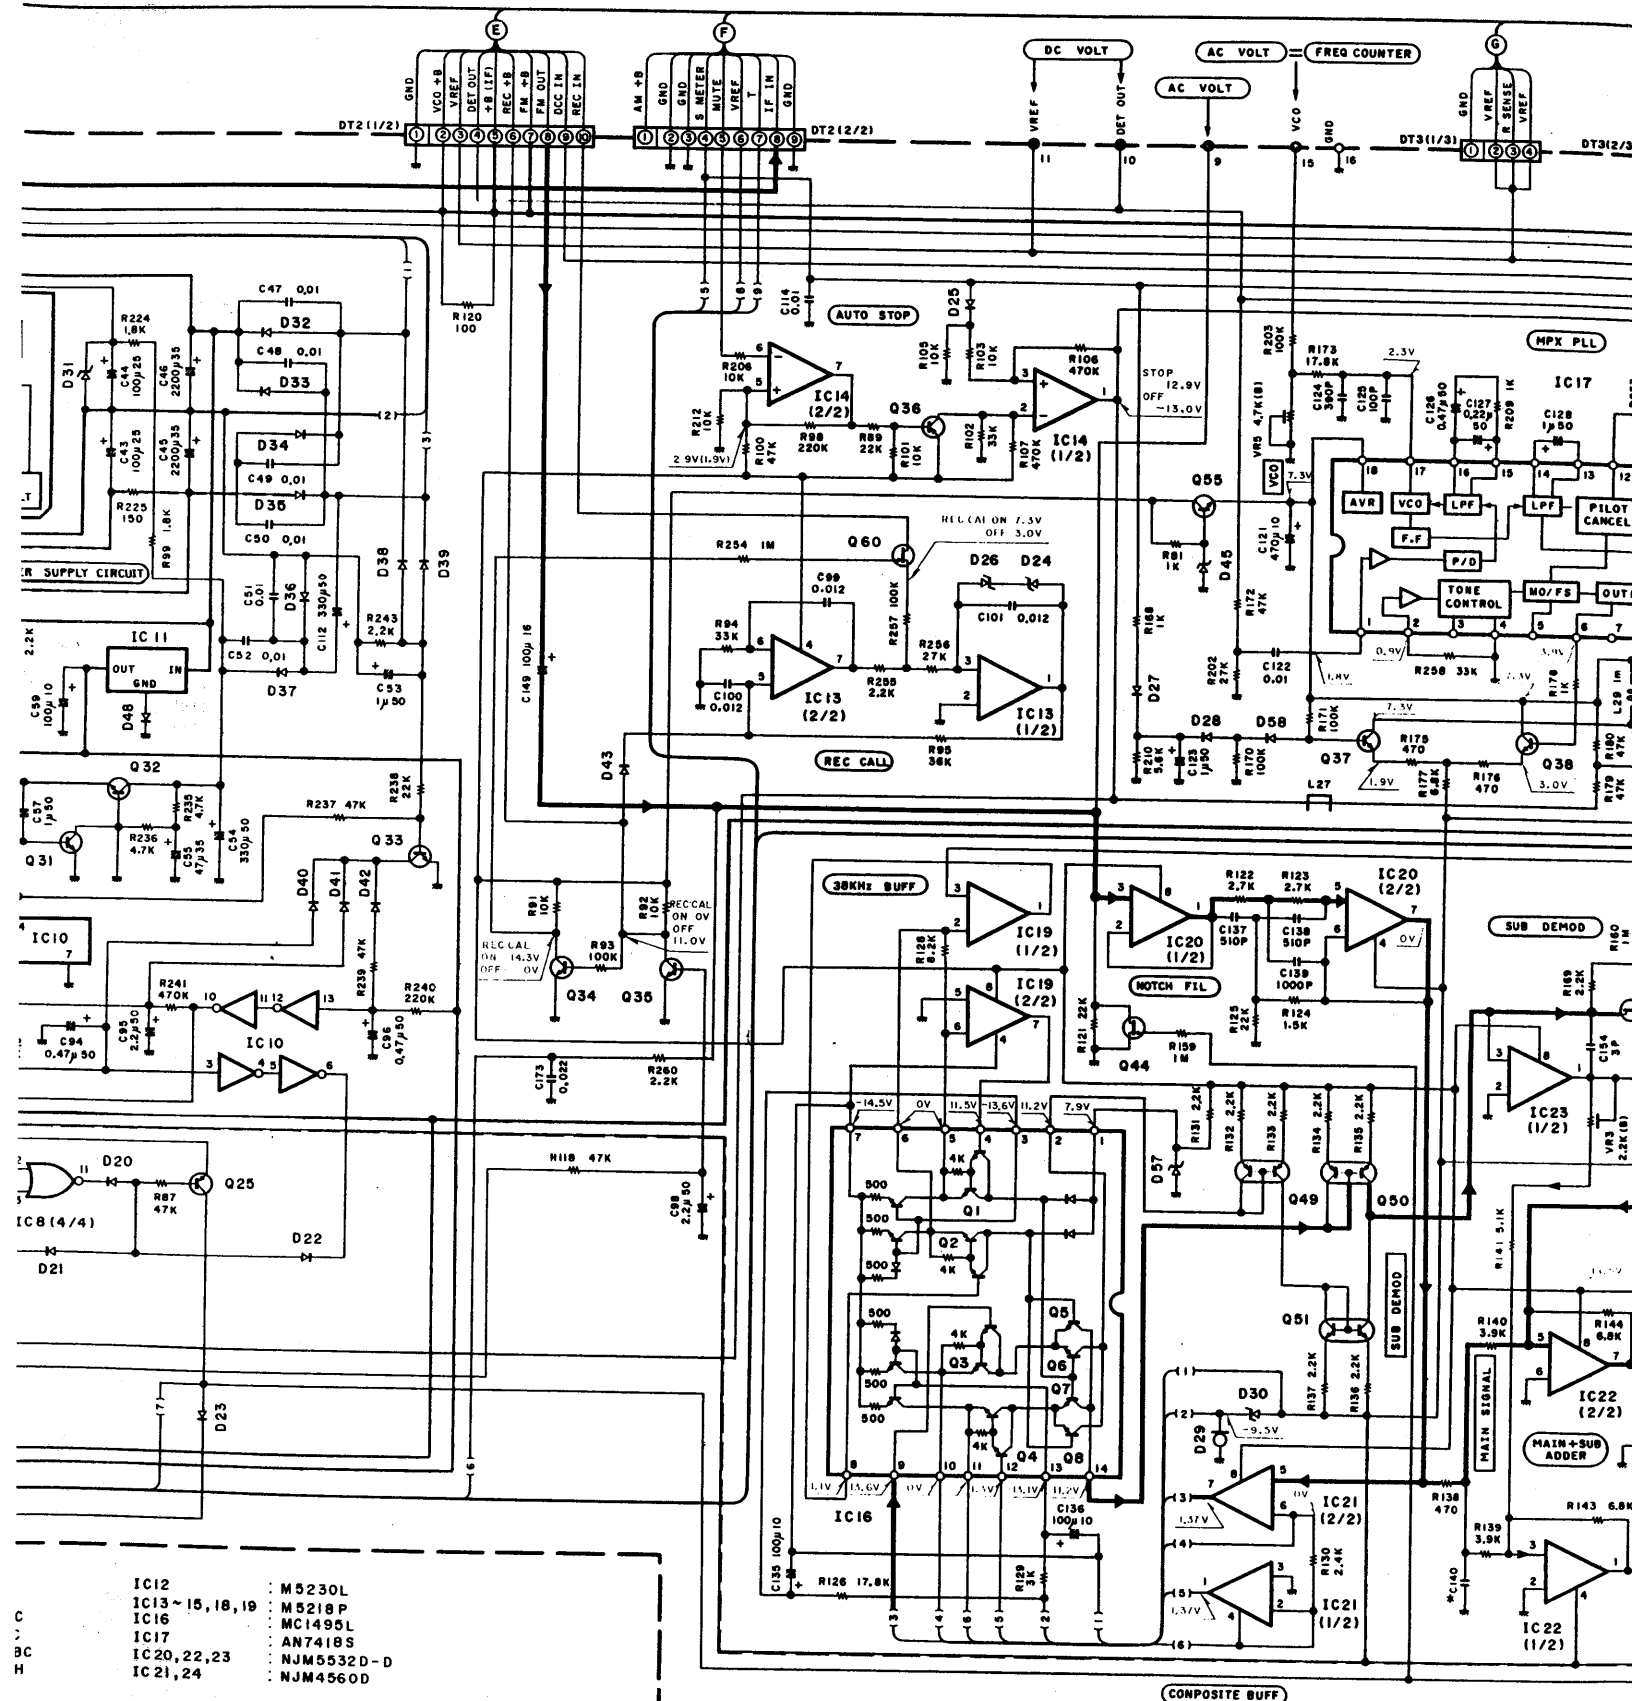


UPC78M05H



BA401





AN7418S



CAUTION: For continued safety, replace safety critical components only with manufacturer's recommended parts (refer to parts list). Δ Indicates safety critical components. To reduce the risk of electric shock, leakage-current or resistance measurements shall be carried out (exposed parts are acceptably insulated from the supply circuit) before the appliance is returned to the customer.

DC voltages are as measured with a high impedance voltmeter during normal operation. Refer to parts list for signal strength of external test points.

Les tensions c.c. doivent être mesurées avec un impédance pendant la réception d'un signal de (avec une force de signal de 60 dB à la borne peuvent différer légèrement du fait des variations des appareils et aux instruments de mesure individuel

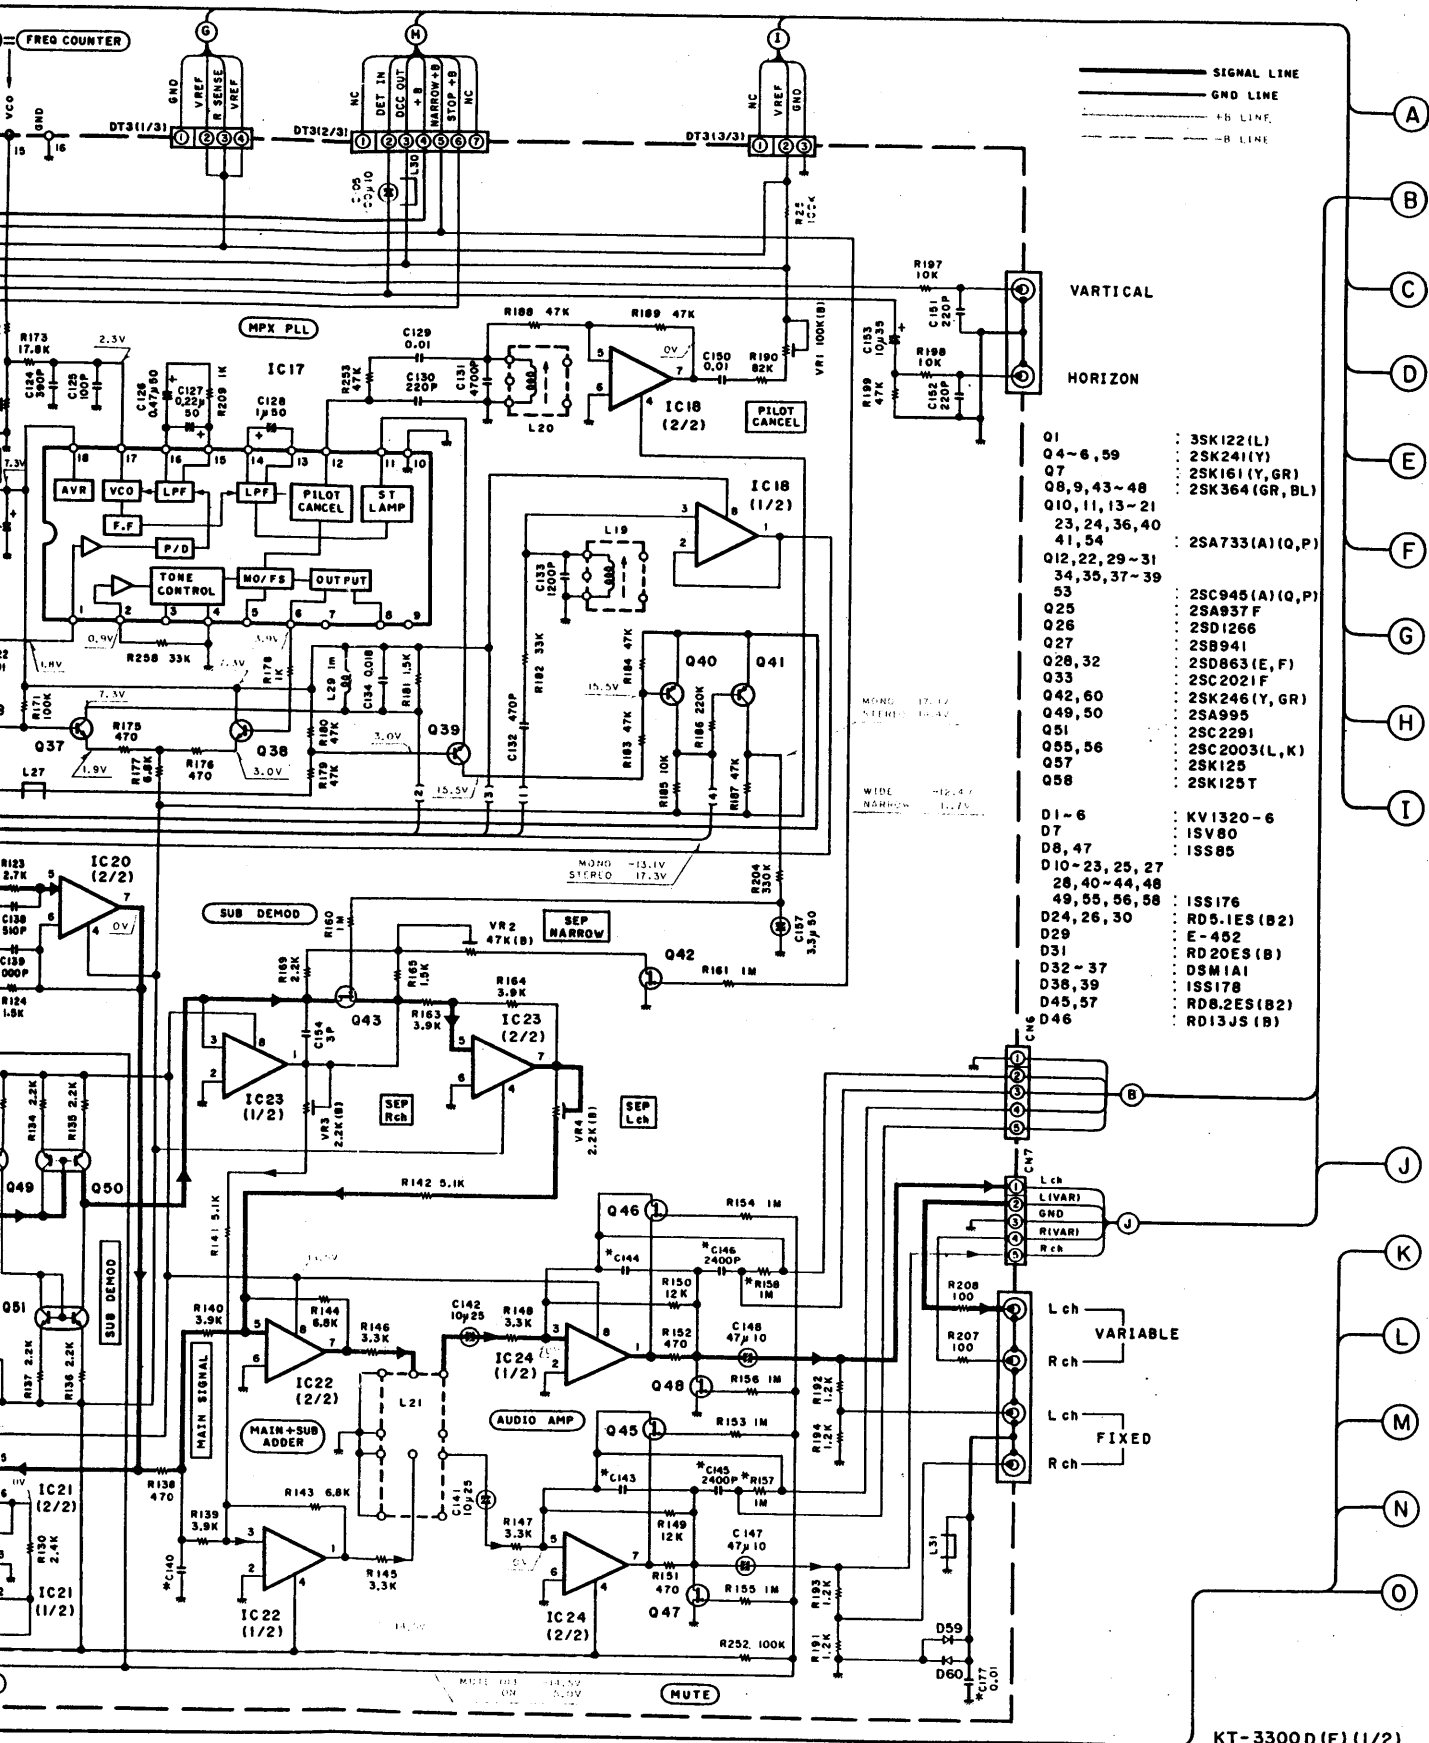

- 01 : 3SK122(L)
- 04-6, 59 : 2SK241(Y)
- 07 : 2SK161(Y, GR)
- 08, 9, 43-48 : 2SK364(GR, BL)
- 010, 11, 13-21 : 2SA733(A)(Q, P)
- 23, 24, 36, 40, 41, 54 : 2SC945(A)(Q, P)
- 012, 22, 29-31, 34, 35, 37-39, 53 : 2SA937 F
- 025 : 2SD1266
- 026 : 2SB941
- 027 : 2SD863(E, F)
- 028, 32 : 2SC2021 F
- 033 : 2SK246(Y, GR)
- 042, 60 : 2SA995
- 049, 50 : 2SC2291
- 051 : 2SC2003(L, K)
- 055, 56 : 2SK125
- 057 : 2SK125 T
- 058 : 2SK125 T
- D1-6 : KV1320-6
- 07 : ISV80
- D8, 47 : ISS85
- D10-23, 25, 27, 28, 40-44, 48, 49, 55, 56, 58 : ISS176
- D24, 26, 30 : RD5.1ES(B2)
- D29 : E-452
- D31 : RD20ES(B)
- D32-37 : DSM1A1
- D38, 39 : ISS178
- D45, 57 : RD8.2ES(B2)
- D46 : RD13JS(B)

KT-3300 D (E) (1/2)

Les tensions c.c. doivent être mesurées avec un voltmètre à haute impédance pendant la réception d'un signal de programme FM d'une force de signal de 60 dB à la borne ANT. Les valeurs indiquées peuvent différer légèrement du fait des variations inhérentes aux instruments et aux instruments de mesure individuels.

Die angegebenen Gleichspannungswerte wurden mit einem hochohmigen Spannungsmesser bei Empfang eines UKW-Signals (mit einer Feldstärke von 60 dB am Antennenanschluß) gemessen. Dabei schwanken die Meßwerte aufgrund von Unterschieden zwischen einzelnen Instrumenten oder Geräten u. U. geringfügig.

KT-3300D